

A

09/01/00

Jc926 U. SX ETC

Express Mail" mailing label number EL 513 141 093 US.

Date of Deposit 9/1/62

Our Case No. 9281/3751

Client Reference No. FC US99053

PATENT APPLICATION TRANSMITTAL LETTER

To the Assistant Commissioner for Patents:

Transmitted herewith for filing is the patent application of SHIGENORI YAMASAKI and KOICHI ABE

for COMMUNICATION APPARATUS CAPABLE OF REGISTERING ID CODES APPROPRIATED TO PORTABLE TRANSMITTERS BY OPERATING THE TRANSMITTERS

Enclosed are:

- ☐ Preliminary Amendment
- ☒ 49 pages of application (including title page), 10 sheet(s) of drawings and the following Appendices : n/a.
- ☒ Declaration and Power of Attorney for Patent Application
- ☒ Assignment transmittal letter and Assignment of the invention to : Alps Electric Co., Ltd.
- ☒ Submission of Certified Copy of Priority Document and certified copy of Japanese Application No. 11-255918.
- ☐ Information Disclosure Statement; PTO-1449 reference .

Claims as Filed	Col. 1	Col. 2
For	No. Filed	No. Extra
Basic Fee		
Total Claims	30-20	10
Indep. Claims	3-3	0
Multiple Dependent Claims Present		

*If the difference in col. 1 is less than zero,
enter "0" in col. 2.

Small Entity	
Rate	Fee
	\$ 345
x\$9=	\$
x\$39=	\$
+ \$130=	\$
Total	\$

on
on
on
on
on
on

Other Than Small Entity	
Rate	Fee
	\$ 690
x\$18=	\$ 180
x\$78=	\$
+\$260=	\$
Total	\$ 870

- ☐ Please charge my Deposit Account No. 23-1925 in the amount of \$: _____. A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$: 870 to cover the filing fee is enclosed.
- ☒ The Assistant Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR § 1.16.
- ☒ Any patent application processing fees under 37 CFR §1.17.
- ☐ The Assistant Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.
- ☐ Any filing fees under 37 CFR § 1.16 for presentation of extra claims.
- ☐ Any patent application processing fees under 37 CFR § 1.17.
- ☐ The issue fee set in 37 CFR § 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR § 1.311(b).

Date _____

9/1/00

Gustavo Siller, Jr.
BRINKS HOFER GILSON & LIONE
Registration No. 32.305

Our Case No. 9281/3751
Client Reference No. FC US99053

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR UNITED STATES LETTERS PATENT

INVENTOR: SHIGENORI YAMASAKI
KOICHI ABE

TITLE: COMMUNICATION APPARATUS
CAPABLE OF REGISTERING ID
CODES APPROPRIATED TO
PORTABLE TRANSMITTERS BY
OPERATING THE TRANSMITTERS

ATTORNEY: Gustavo Siller, Jr.
BRINKS HOFER GILSON & LIONE
P.O. BOX 10395
CHICAGO, ILLINOIS 60610
(312) 321-4200

EXPRESS MAIL NO. EL 513 141 093 US

DATE OF MAILING 9/11/60

001050" 5945960

COMMUNICATION APPARATUS CAPABLE OF REGISTERING ID CODES
APPROPRIATED TO PORTABLE TRANSMITTERS BY OPERATING THE
TRANSMITTERS

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a communication apparatus, and particularly relates to a communication apparatus wherein information signals containing ID (Identification) code are transmitted from a portable transmitter, and a controlled device is controlled in the event that the ID code within the information signals received with a receiver match a registered reference code, wherein the ID code of the portable transmitter is registered by the user.

2. Description of the Related Art

Keyless entry devices for automobiles are known as an example of communication apparatuses comprising a portable transmitter and a receiver, wherein upon transmitting of information signals containing ID code by operating the operating unit of the portable transmitter, the ID code is extracted from the information signals received at the receiver side, and wherein the controlled device can be controlled in the event that that ID code matches the reference code already registered thereto.

001050" 59445960

With such keyless entry devices, each user carries the portable transmitter, and the receiver is installed in the vehicle.

Fig. 9 is a block diagram illustrating an example of the configuration of a portable transmitter used with a known keyless entry device, and Fig. 10 is a block diagram illustrating an example of the configuration of a receiver used with a known keyless entry device.

As shown in Fig. 9, the portable transmitter 70 is provided with an operating switch unit 71 having one or more operating switches, a function code converting unit 72, a transmitting code converting unit 73, an ID code storing unit 74, a transmitting unit 75, and a transmitting antenna 76. These components 71 through 76 are connected as shown in Fig. 9.

Also, the receiver 80 is provided with a receiving unit 81, a signal processing unit 82, a reference code storing unit 83, a function code storing unit 84, a control signal generating unit 85 which is built into the signal processing unit 82, an automobile ignition key 86, and a receiving antenna 87, wherein the signal processing unit 82 and the control signal generating unit 85 are built into the control unit (CPU), and the reference code storing unit 83 and function code storing unit 84 are built into the EEPROM. These components 81 through 87 are connected as shown in Fig.

10.

The portable transmitter 70 and the receiver 80 with the above configurations each operate as described next.

First, with regard to the portable transmitter 70, the operating switch unit 71 generates various types of switch information for performing operations of controlled mechanisms of the vehicle, for example, locking or unlocking the doors, opening the trunk, and so forth, by the user operating desired operating switches. The function code converting unit 72 converts the switch information output from the operating switch unit 71 into function code corresponding to the information contents thereof. The ID code storing unit 74 stores ID code unique to each portable transmitter 70. The transmitting code converting unit 73 forms a transmitting code wherein a header code and an end code and the like are added to the function code output from the function code converting unit 72 and the ID code read out from the ID code storing unit 74. The transmitting unit 75 converts the transmitting code formed by the transmitting code converting unit 73 into transmitting signals carried by electromagnetic waves or the like, and transmits the transmitting signals through the transmitting antenna 76.

On the other hand, with regard to the receiver 80, the receiving unit 81 receives the transmitting signals through the receiving antenna 87, and restores the transmitting code.

001050-5945960

In this case, the ID code appropriated to each portable transmitter 70 in the known keyless entry device is stored in the ID code storing unit 74 of the portable transmitter 70 at the time of manufacturing and is unique to the portable transmitter 70, and the reference code stored in the reference code storing unit 83 of the receiver 80 is stored as the reference code by extracting the ID code transmitted from the portable transmitter 70 and writing the extracted ID code to the reference code storing unit 83.

Generally, users using a keyless entry device prefer that there is no compatibility between the portable transmitter 70 of the user and the portable transmitter 70 of others, so the ID code of the portable transmitter 70 of

the user must differ from the ID code of the portable transmitter 70 of others.

One problem is that the portable transmitter 70 of the known keyless entry device requires an ID code writing device, since ID codes which differ for each vehicle are written to the ID code storing units 74 by the manufacturer at the time of manufacturing. An additional problem is that ID code management becomes complicated.

SUMMARY OF THE INVENTION

The present invention has been made in view of the known portable transmitter and receiver combination, and it is an object thereof to provide a communication apparatus enabling ID codes appropriated to portable transmitters to be registered by operating the portable transmitter.

In order to achieve the above objects, a first aspect of the present invention is a communication apparatus including: a portable transmitter, having at least one operating switch, a first storing unit wherein an ID code is registered, a first control unit, and a transmitting unit. The ID code is made up of a plurality of ID code sections, each ID code section corresponding to an operation of the operating switch. The portable transmitter also comprises an ID registration mode setting mechanism. When the first control unit is set to the ID registration mode by the ID

0954459-090100

registration mode setting mechanism and the operating switch is operated, the ID code sections are supplied to the first storing unit to register as the ID code.

In other embodiments, the operating switch may be operated multiple times and/or the ID code sections may be supplied sequentially to the first storing unit.

Also, in order to achieve the above objects, a second aspect of the present invention is a communication apparatus including: a portable transmitter, having at least one operating switch, a first storing unit wherein an ID code is registered, a second storing unit, a first control unit, and a transmitting unit. The ID code is made up of a plurality of ID code sections, each ID code section corresponding to an operation of the operating switch. The portable transmitter also comprises an ID registration mode setting mechanism. When the first control unit is set to the ID registration mode by the ID registration mode setting mechanism and the operating switch is operated, the ID code section is stored in the second storing unit, and at the point that all ID code sections are stored in the second storing unit, the all ID code sections are joined and transferred to the first storing unit, to register as the ID code.

Further, in order to achieve the above objects, a third aspect of the present invention is a communication apparatus

007050" 5945960

including: a portable transmitter, having at least one operating switch, a first storing unit wherein an ID code is registered, a second storing unit, a first control unit, and a transmitting unit. The ID code is made up of a plurality of ID code sections, each ID code section corresponding to an operation of the operating switch. The portable transmitter comprises an ID registration mode setting mechanism. When the first control unit is set to the ID registration mode by the ID registration mode setting mechanism and the operating switch is operated, all ID code sections are stored in the second storing unit except for the last ID code section, and at the point that the last ID code section is formed, the ID code sections stored in the second storing unit are read out, the read ID code sections and the last ID code section are joined and transferred to the first storing unit, to register as the ID code.

According to the first aspect, ID code registration can be made from the portable transmitter by operation of the user, and in this case, the ID code to be registered is a random code due to the switch operation timing, so a portable transmitter having no compatibility between the portable transmitter of the user and the portable transmitters of others can be obtained.

Also, according to the second aspect, the formed ID code sections are sequentially stored in a second storing

unit formed of RAM, and at the point that all ID code sections are stored in the second storing unit, all ID code sections are joined and read out from the second storing unit, and transferred and registered as ID code to the first storing unit, so in the event that ID code registration has been aborted, all that is necessary is to erase the ID code sections stored in the RAM, so there is no effect on the first storing unit.

Also, according to the third aspect, the formed ID code sections are sequentially stored in a second storing unit formed of RAM, and at the point that the last ID code section is formed, the ID code sections stored in the second storing unit are read out from the second storing unit and joined with the last ID code section, and transferred and registered as ID code to the first storing unit, so the process of storing and reading the last ID code section to and from the second storing unit can be omitted, which is efficient.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block configuration diagram illustrating a first embodiment of the communication apparatus according to the present invention, and illustrates the configuration of the portable transmitter;

Fig. 2 is a block configuration diagram illustrating an

embodiment of the communication apparatus according to the present invention, and illustrates the configuration of the receiver;

Fig. 3 is an explanatory diagram illustrating an example of the operating procedures for registering an ID code to the ID code storing unit of the portable transmitter shown in Fig. 1;

Fig. 4 is an explanatory action diagram illustrating an example wherein an ID code cannot be registered, at the time of registering an ID code to the ID code storing unit of the portable transmitter;

Fig. 5 is a block configuration diagram illustrating a second embodiment of the communication apparatus according to the present invention, and is a block diagram illustrating the configuration of the portable transmitter;

Fig. 6 is an explanatory diagram illustrating an example of the operating procedures for registering the ID code to the ID code storing unit with the portable transmitter shown in Fig. 5;

Fig. 7 is an explanatory diagram illustrating an example of the operating procedures for registering an ID code to the IUD code registering unit of the portable transmitter in a third embodiment of the communication apparatus according to the present invention;

Fig. 8 is an explanatory diagram illustrating an

001060" 69445960

example of the operating procedures for writing a reference code to the reference code storing unit of the receiver, using the portable transmitter:

Fig. 9 is a block diagram illustrating an example of the configuration of a portable transmitter used with a known keyless entry apparatus; and

Fig. 10 is a block diagram illustrating an example of the configuration of a receiver used with a known keyless entry apparatus.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The following is a description of the embodiments of the present invention, with reference to the drawings.
First Embodiment

Figs. 1 and 2 are block diagrams illustrating a first embodiment of the communication apparatus according to the present invention, wherein Fig. 1 is a block diagram illustrating the configuration of the portable transmitter 10, and Fig. 2 is a block diagram illustrating the configuration of the receiver 20, illustrating an example of a keyless entry device wherein the communication apparatus is made up of a portable transmitter 10 and a receiver 20.

As shown in Fig. 1, the portable transmitter 10 is provided with an operating switch unit (operating SW) 1 having one or more operating switches, a control unit (first

The operating switch unit 1, control unit 2, transmitting unit 3, EEPROM 4, ID code storing unit 4₁, display unit 5, and transmitting antenna 6, are connected as shown in Fig. 1. Also, the door lock switch 1₁, door unlock switch 1₂, trunk open switch 1₃, and panic switch 1₄ of the operating switch unit 1 are connected as shown in Fig. 1, and the function code converting unit 2₁, transmitting code forming unit 2₂, mode control unit 2₃, ID code generating unit 2₄, clock signal generating unit 2₅, and counter 2₆ of the control unit 2 are also connected as shown in Fig. 1.

On the other hand, as shown in Fig. 2, the receiver 20 comprises a receiver 11, control unit (second control unit) (CPU) 12, EEPROM (second storing unit) 13, and receiving antenna 14. In this case, the control unit 12 has a built-

in signal processing unit 12₁. The signal processing unit 12₁ has a built-in control signal generating unit 12₂, to which signals from an external ignition key 15 are input. The EEPROM 13 has built-in reference code storing unit 13₁ and function code storing unit 13₂.

Then, the receiving unit 11, control unit 12, EEPROM 13, receiving antenna 14, and ignition key 15, are connected as shown in Fig. 2. Also, the signal processing unit 12₁ and control signal generating unit 12₂ of the control unit 12 are connected as shown in Fig. 2, and the reference code storing unit 13₁ and function code storing unit 13₂ of the EEPROM 13 are also connected as shown in Fig. 2.

Now, at the point that the user has obtained the portable transmitter 10 and receiver 20 of the above configuration (point of product purchase), no ID code has yet been registered to the ID code storing unit 4₁ of the portable transmitter 10, nor has a reference code been registered to the reference code storing unit 13₁ of the receiver 20. Accordingly, there is the need for the user to register an ID code to the ID code storing unit 4₁ of the portable transmitter 10, and use the portable transmitter 10 to which the ID code has been registered to store the reference code in the reference code storing unit 13₁ of the receiver 20, before using the portable transmitter 10 and receiver 20.

The operating procedures for registering the ID code to the ID code storing unit 4₁ of the portable transmitter 10 will now be described using the explanatory diagram shown in Fig. 3.

The user performs a predetermined operation using one or more operating switches of the operating switch unit 1 of the portable transmitter 10, e.g., first operating the trunk opening switch 1₃, and within 100 milliseconds of this operation presses both the trunk opening switch 1₃ and the door lock switch 1₁ for 1 second or more, whereby the mode control unit 2₃ detects that this predetermined operation has been made, and sets the control unit 2 in the ID registration mode. Once the control unit 2 is set in the ID registration mode, the counter 2₆ is reset, the first count of clock signals supplied from the clock signal generating unit 2₅ is started at the counter 2₆, and a first pulse signal is supplied to one LED of the display unit 5 from the mode control unit 2₃, e.g., the red LED. The red LED is lit multiple times for 200 milliseconds at 500 millisecond intervals due to the first pulse signals being supplied, thereby notifying the user that the portable transmitter 10

Next, the user operates the latter-operated switch of the operating switch unit 1 of the portable transmitter 10, the door lock switch 1₁ for example, for 100 milliseconds or longer, following which the operation is stopped, which causes a second pulse signal to be supplied to another LED of the display unit 5 from the ID code generating unit 2₄, e.g., the green LED, and the green LED is lit for 500 milliseconds only one time. Then, at the point that the lighting of the green LED is finished, the first count value of the clock signal is determined at the counter 2₆, the determined count value is supplied to the ID code storing unit 4₁ of the EEPROM 4 through the ID code generating unit 2₄, and is stored as the first ID code section. At this time, the counter 2₆ is reset, subsequently starts the second count of clock signals being supplied, and the first pulse signals are supplied multiple times from the ID code generating unit 2₄ to the red LED as in the case above, so that the red LED is lit intermittently.

Next, the user operates the door lock switch 1_1 again for 100 milliseconds or more, and then stops the operation, which causes the second pulse signal to be supplied from the

ID code generating unit 2₄ to the green LED again, and the green LED is lit for 500 milliseconds only one time. Then, at the point that the lighting of the green LED is finished this time, the second count value of the clock signal is determined at the counter 2₆, the determined count value is supplied to the ID code storing unit 4₁ through the ID code generating unit 2₄, and is stored as the second ID code section. At this time also, the counter 2₆ is reset, subsequently starts the third count of clock signals being supplied, and the red LED is lit intermittently.

Next, the user operates the door lock switch 1₁ for the third time for 100 milliseconds or more, and then stops the operation, which causes the second pulse signal to be supplied from the ID code generating unit 2₄ to the green LED, and the green LED is lit for 1 second only one time, which is a longer time than the previous two times. Then, at the point that the lighting of the green LED is finished this time, the third count value of the clock signal is determined at the counter 2₆, the determined count value is supplied to the ID code storing unit 4₁ through the ID code generating unit 2₄, and is stored as the third ID code section.

The first through third ID code sections stored in the ID code storing unit 4₁ form one ID code as a whole.

In this case, the first through third ID code sections

sequentially stored in the ID code storing unit 4_1 (three count values) are each made up of 8 bits, and one of the 256 combinations for data values from 00000000 through 11111111 is stored in the ID code storing unit 4_1 for each ID code section.

Following resetting of the counter 2_6 , the first count of the clock signal performed by the counter 2_6 sequentially changes from 00000000 to 11111111 each time a clock signal is applied, returns to 00000000 when 11111111 is reached, and then changes again toward 11111111. Then, when the first lighting of the green LED ends, the count value of the counter 2_6 is stored in the ID code storing unit 4_1 as the first code section.

Subsequently, the counter 2_6 is reset, and the second and third counts of the clock signal performed by the counter 2_6 act in the same manner as with the previous case, and when the second lighting of the green LED ends, the count value of the counter 2_6 is stored in the ID code storing unit 4_1 as the second code section, and when the third lighting of the green LED ends, the count value of the counter 2_6 is stored in the ID code storing unit 4_1 as the third code section.

In this way, the first through third code sections (count values) stored in the ID code storing unit 4_1 of the portable transmitter 10 according to the first present

registered will be described with reference to Fig. 4.

As shown in Fig. 4, the operating procedures up to the control unit 2 of the portable transmitter 10 being set to the ID registration mode by execution of predetermined operations of the operating switch unit 1 by the user, are the same as the operating procedures already described with reference to Fig. 3.

Next, the user operates the latter-operated switch of the operating switch unit 1 of the portable transmitter 10, the door lock switch 1_1 for example, for 100 milliseconds or longer, following which the operation of the door lock switch 1_1 is stopped, which causes a second pulse signal to be supplied to the green LED of the display unit 5 from the ID code generating unit 2_4 , and the green LED is lit for 500 milliseconds. Then, at the point that the lighting of the green LED is finished, the first count value of the clock signal is determined at the counter 2_6 , the determined count value is supplied to the ID code storing unit 4_1 through the ID code generating unit 2_4 , and is stored as the first ID code section in the ID code storing unit 4_1 . At this time, the counter 2_6 is reset, subsequently starts the second count of clock signals being supplied, and the first pulse signals are supplied multiple times from the ID code generating unit 2_4 to the red LED as in the case above, so that the red LED is lit intermittently.

Subsequently, in the event that the user does not operate the latter-operated switch of the operating switch unit 1 of the portable transmitter 10, the door lock switch 1₁ for example, and 10 seconds elapse since the control unit 2 has been set to the ID registration mode, the control unit 2 automatically reverts from the ID registration mode to the normal mode. At this time, only the first count value of the clock signal is determined, and the second and third count values are not determined, so the ID code generating unit 2₄ discards the first ID code section (first count value) stored in the ID code storing unit 4₁, and there is no registration of ID code made to the ID code storing unit 4₁.

Another state wherein the ID code is not registered to the ID code storing unit 4₁ is a case wherein the first and second count values are each determined, following which the control unit 2 automatically reverts from the ID registration mode to the normal mode.

Second Embodiment

Next, Fig. 5 is a block diagram illustrating a second embodiment of the communication apparatus according to the present invention, and is a block diagram illustrating the configuration of a portable transmitter 10'.

As shown in Fig. 5, the only difference between the configuration of the portable transmitter 10' according to

the second embodiment (hereafter referred to as "portable transmitter 10'") and the configuration of the portable transmitter 10 according to the first embodiment (hereafter referred to as "portable transmitter 10") is that the portable transmitter 10' is provided with RAM (temporary storing unit, i.e., second storing unit) 7, and the RAM 7 is joined with the ID code generating unit 2₄, whereas the portable transmitter 10 does not have such a RAM 7, and other wise there is no configuration difference between the portable transmitter 10' and the portable transmitter 10. Accordingly, further description of the configuration of the portable transmitter 10' will be omitted.

Also, the configuration of the receiver 20 in the second embodiment is the same as the configuration of the receiver 20 according to the first embodiment shown in Fig. 2, so the receiver 20 according to the second embodiment is omitted from the drawings.

With the portable transmitter 10' having the above configuration, description of the operating procedures for registering the ID code to the ID code storing unit 4₁ (first storing unit) with reference to Fig. 3 is as follows.

The series of actions up to the control unit 2 of the portable transmitter 10 being set to the ID registration mode by the user executing predetermined operations of the operating switch unit 1 is the same as the series of actions

Next, the series of actions of the user operating the latter-operated switch of the operating switch unit 1 of the portable transmitter 10 the third time, and the subsequent ending of operation of the switch leading up to the determining of the third count value of the clock signal at the counter 2₆, is also the same as the series of actions already described with reference to Fig. 3.

Then, once the first through third ID code sections are each stored in the first through third storing areas of the RAM 7, the ID code generating unit 2₄ reads out and joins the first through third ID code sections from the RAM 7, the joined first through third ID code sections are transferred

In this case, the first through third ID code sections sequentially stored in the first through third storing areas of the RAM 7 (three count values) are each made up of 8 bits as with the above first embodiment, and one of the 256 combinations for data values from 00000000 through 11111111 is stored in the first through third storing areas.

Incidentally, with the above embodiment, first through third storing areas are provided in the RAM 7 of the portable transmitter 10', and the first through third ID code sections are respectively stored in the first through third storing areas in sequence, following which the first through third ID code sections are read out and joined, and registered to the ID code storing unit 4₁ as an ID code.

Conversely, a third embodiment which has the same configuration as that of the second embodiment shown in Fig. 5 registers ID codes by the operation shown in Fig. 7. That is to say, only first and second storing areas are provided in the RAM 7, and the first and second ID code sections are respectively stored in the first and second storing areas in sequence, following which, at the point that the third count value is determined by the ID code generating unit 24, and the third ID code section is thus obtained, this third ID

well, the first through third code sections (count values) stored in the RAM 7 are set randomly by the operating timing of switch operations made by the user, and the setting values cannot be selected at will. Accordingly, the probability that the ID code obtained by joining the first through third code section which is registered to one portable transmitter 10' and an ID code registered to another portable transmitter 10' using the same registering means match is extremely small, and thus a portable transmitter 10' with no compatibility can be obtained.

On the other hand, an example of the action in the event that the ID code cannot be registered to the ID code storing unit 4₁ with the portable transmitter 10' will now be described.

That is, with the first embodiment shown in Fig. 4, the storing unit where the count value is stored is RAM 7 instead of the EEPROM 4, and except for the fact that the ID code sections stored in the RAM 7 are discarded in the event that ID code registration is aborted, the procedures are the same.

Now, though the arrangement of the operating procedures for setting the first control unit 2 of the portable transmitter 10 and 10' to the ID registration mode according to the first through third embodiments involve a switch of the operating switch unit 1 being operated while another

switch is being operated, the operating procedures for setting the first control unit 2 of the portable transmitter 10 and 10' to the ID registration mode according to the present invention are not restricted to such, rather, an arrangement may be made wherein two or more switches are operated in a predetermined order, e.g., the door lock switch 1_1 being operated first and then the trunk opening/closing switch 1_3 being operated, following which the door unlock switch 1_2 is operated, or, an arrangement may be made wherein operating of a specified one switch is repeatedly executed for a predetermined amount of time or longer, e.g., the door unlock switch 1_2 being operated for one second following which the door unlock switch 1_2 is operated for one second with a one second interval therebetween.

Also, according to the first through third embodiments, the door lock switch 1_1 used for setting the ID registration mode is also used for determinating the count value, but there is no particular need to use the same switch for these switches. Which switch is to be used for the determining of the three count values can be decided arbitrarily, and there is no difference distinguished according to which switch is operated. In this case, arranging such that the count value is determinated by randomly selecting and operating the switches at the time of determinating the three count values

On the other hand, as with the first through third embodiments, stipulating that only one switch is used can prevent an ID code being registered by unintentional operation of switches, and stipulating that particular switches be used for each of the three count determining operations allows ID code registration to be performed in an even more sure manner.

Further, an example has been described with regard to the first through third embodiments wherein the count of the counter 26 is stopped by operating a switch, and resetting the counter 26 each time determining of a count value is performed, but an arrangement may be made wherein the counter 26 is not reset but continues to count.

In this case, the cycle time for the count of the counter 2_6 can be set arbitrarily, but setting the cycle time at approximately 500 milliseconds allows early operations by the user to be dealt with sufficiently, and also allows ID code with excellent randomness to be registered.

The operating (lit) time and operating (lit) intervals shown in Figs. 3, 6, and 7, with regard to the first through third embodiments are nothing more than an example thereof, and the operating (lit) time and operating (lit) intervals

Next, Fig. 8 is an explanatory diagram illustrating an example of the operating procedures for writing the reference code to the reference code storing unit 10₁ of the receiver 20 using the portable transmitter 10 or portable transmitter 10'.

The user carries the portable transmitter 10, switches the ignition key 15 of the vehicle from the accessory (ACC) position to the on (ON) position, and supplies a key input pulse to the signal processing unit 12₁. Next, the user presses one of the switches of the operating switch unit 1 of the portable transmitter 10 within a time T1 from the key input pulse being supplied to the signal processing unit 12₁, and following the ID code "a" obtained by that operation being converted to a transmitting code, this is transmitted from the portable transmitter 10 as a transmitting signal. The receiver 20 receives this transmitting signal with the receiving unit 11 and supplies it to the signal processing

The user carries the portable transmitter 10, switches the ignition key 15 of the vehicle from the accessory (ACC) position to the on (ON) position, and supplies a key input pulse to the signal processing unit 12₁. Next, the user presses one of the switches of the operating switch unit 1 of the portable transmitter 10 within a time T1 from the key input pulse being supplied to the signal processing unit 12₁, and following the ID code "a" obtained by that operation being converted to a transmitting code, this is transmitted from the portable transmitter 10 as a transmitting signal. The receiver 20 receives this transmitting signal with the receiving unit 11 and supplies it to the signal processing

Next, within a time T3 from the stopping the supplying of the key input pulse in the first action cycle, the user operates the ignition key 15 and the switch of the portable transmitter 10 in the same manner as with the first action cycle, and the second action cycle is completed through the same action series as that of the first action cycle.

Next, the same operation is performed in the third action cycle and the fourth action cycle. In this case, in the fourth action cycle, the action form is the same as that of the first through third action cycles up to the extracting of the ID code "d" within the transmitting code with the signal processing unit 9₁ within the time T1 from the starting of supplying the key pulses, but the operating mode of the control unit 12 including the signal processing unit 12₁ is converted from the normal action mode to the reference code writing mode at the point that the time T4 has elapsed from stopping the supplying of the ID code "d",

The operating procedures for writing the reference code are as follows.

Next, in the event that the user desires to write a reference (ID) code (second reference code) for another portable transmitter 10, the user operates this portable transmitter 10 in the same manner as the previous case, and writes the second reference code to the reference code

Next, in the event that the user desires to write a reference (ID) code (second reference code) for another portable transmitter 10, the user operates this portable transmitter 10 in the same manner as the previous case, and writes the second reference code to the reference code

Subsequently, in the same way, in the event that there are other portable transmitters 10 to write reference code for, the user performs the same operating processes for writing reference code as above, which writes the reference codes to the reference code storing unit 13₁.

In this case, suitable time ranges for the times T1, T2, T3, T4, T5, and T6 are shown in Fig. 8, but the times T1 through T6 are not necessarily restricted to the time ranges shown.

Next, description will be made regarding the operation (normal operation) carried out between the portable transmitter 10 and the receiver 20 in the event that an ID code is registered in the ID code storing unit 4₁ of the portable transmitter 10 (or portable transmitter 10') and a reference code corresponding to the ID code is registered in

the reference code storing unit 10₁ of the receiver 20.

In the event that the user operates one of the operating switches on the operating switch unit 1, e.g., the door lock switch 1₁ for locking the doors of the vehicle, lock switch information indicating that the operation has been made from the lock switch 1₁ is output, and supplied to the function code converting unit 2₁. Upon receiving the lock switch information, the function code converting unit 2₁ converts the lock switch information into a corresponding function code and supplies this to the transmitting code forming unit 2₂. Once the function code is supplied, the transmitting code forming unit 2₂ adds to the function code ID code unique to the portable transmitter 10 read from the ID code storing unit 4₁, header code, end code, etc., thereby forming a transmitting code, and the formed transmitting code is supplied to the transmitting unit 3. The transmitting unit 3 forms transmitting signals of the supplied transmitting code being carried by wireless signals such as radio waves, and the transmitting signals are transmitted from the transmitting antenna 6.

On the other hand, once the receiver 20 receives the transmitting signals from the portable transmitter 10 with the receiving antenna 14, the transmitting signals are supplied to the receiving unit 11 as received signals, the receiving unit 11 restores the transmitting code within the

001000" 69445960

received signals, and the obtained transmitting code is supplied to the signal processing unit 12₁. The signal processing unit 12₁ extracts the ID code within the supplied transmitting code, and compares the extracted ID code with the reference code registered in the reference code storing unit 13₁. In the event that the ID code and the reference code match, the function code in the transmitting code is collated with the various function codes stored in the function code storing unit 13₂. The control signal generating unit 12₂ generates control signals according to the function code which has been matched by collation, which in this case is a control signal for locking the vehicle doors, whereby the doors are locked by this control signal.

Also, in the event that other operating switches on the operating switch unit 1 are operated, e.g., the unlock switch 1₂ for unlocking the doors of the vehicle, function operations corresponding to the operating switch are carried out at the vehicle.

Incidentally, though the above description of the above embodiments has been made with reference to an example of a keyless entry device for the communication apparatus, the communication apparatus according to the present invention is by no means restricted to a keyless entry device; rather, the present invention can be applied to other apparatuses which have a portable transmitter and a receiver, and which

095443-1091060-6944590

resemble a keyless entry device.

Thus, according to the first aspect of the present invention, ID code registration can be made from the portable transmitter by operation of the user, and in this case, the ID code to be registered is a random code due to the switch operation timing, so a portable transmitter wherein there is no compatibility between the portable transmitter of the user and the portable transmitters of others can be obtained.

Also, according to the second aspect of the present invention, the formed ID code sections are sequentially stored in a second storing unit formed of RAM, and at the point that all ID code sections are stored in the second storing unit, all ID code sections are joined and read out from the second storing unit, and transferred and registered as ID code to the first storing unit, so in the event that ID code registration has been aborted, all that is necessary is to erase the ID code sections stored in the RAM, so there is no effect on the first storing unit.

Also, according to the third aspect of the present invention, the formed ID code sections are sequentially stored in a second storing unit formed of RAM, and at the point that the last ID code section is formed, the ID code sections stored in the second storing unit are read out from the second storing unit and joined with the last ID code

section, and transferred and registered as ID code to the first storing unit, so the process of storing and reading the last ID code section to and from the second storing unit can be omitted, which is efficient.

Thus, the present invention is a communication apparatus that comprises a portable transmitter and a receiver. The portable transmitter includes at least one operating switch, a storing unit, a control unit, an ID registering mode setting mechanism and a transmitting unit. The storing unit contains an ID code that has ID code sections, each of which corresponds to an operation of the operating switch. The ID registering mode setting mechanism sets the control unit to an ID registration mode, and subsequently when the operating switch is operated the ID code sections are supplied to the storing unit to register as the ID code.

However, more than one operating switch may exist and/or the operating switch(es) may be operated multiple times in a predetermined order or format before the ID code sections register as the ID code. Similarly, if the operating switch(es) are not operated in the predetermined order or format within a set amount of time, the control unit may revert out of the ID registration mode.

The portable transmitter may have an additional storage unit that stores either all of the ID code sections

In addition, the ID code sections may be sequentially supplied to the storing unit(s). The portable transmitter may also comprise a clock generating unit that generates clock signals and a counter that counts the clock signals and forms the ID code sections from the counter values. An LED or other mechanism may be used to notify the user of the storage state of the ID code sections.

1. A communication apparatus, comprising:

- a portable transmitter including:
 - at least one operating switch,
 - a first storing unit containing an ID code registered therein, the ID code including a plurality of ID code sections, each ID code section corresponding to an operation of said at least one operating switch, a first control unit,
 - an ID registering mode setting mechanism to set the first control unit to an ID registration mode, and
 - a transmitting unit to transmit an electromagnetic signal having the ID code; and
- a receiver including:
 - a receiving unit to receive the electromagnetic signal having the ID code,
 - a second storing unit containing a reference code stored therein, and
 - a control signal generating unit;

said receiver comparing said ID code within the electromagnetic signal with said reference code and supplying control signals from said control signal generating unit to a controlled device when said ID code and said reference

when said first control unit is set to the ID registration mode by said ID registration mode setting mechanism and said at least one operating switch is operated, the ID code sections are supplied to said first storing unit to register as said ID code.

3. A communication apparatus according to claim 2,
wherein the ID code sections are sequentially supplied to
said first storing unit.

4. A communication apparatus according to claim 1, wherein said ID registration mode setting mechanism comprises said at least one operating switch and a mode control unit within said first control unit to set the ID registration mode from the operation of said at least one

operating switch in a predetermined format.

5. A communication apparatus according to claim 4, further comprising at least two operating switches, said ID registration mode setting mechanism further comprising operation of said at least two operating switches in a predetermined order.

6. A communication apparatus according to claim 1, said portable transmitter further comprising:
a clock generating unit to generate clock signals; and
a counter to count the clock signals generated by said clock generating unit;

wherein said ID code sections are formed by counter values of said counter.

7. A communication apparatus according to claim 1, said portable transmitter comprising a notifying mechanism to indicate a storage state of said ID code sections.

8. A communication apparatus according to claim 7, wherein said notifying mechanism is a light-emitting diode.

9. A communication apparatus according to claim 1, wherein when said first control unit is set to the ID

007060" 65445360

10. A communication apparatus according to claim 2, wherein when said first control unit is set to the ID registration mode by said ID registration mode setting mechanism and said at least one operating switch is not operated multiple times within a predetermined time period, said first control unit reverts out of the ID registration mode.

a portable transmitter including:

a first storing unit containing an ID code

a second storing unit,

an ID registering mode setting mechanism to set the control unit to an ID registration mode, and

a transmitting unit to transmit an electromagnetic signal having the ID code; and

a receiving unit to receive the electromagnetic signal having the ID code,

a control signal generating unit;

when said first control unit is set to the ID registration mode by said ID registration mode setting mechanism and said at least one operating switch is operated , said ID code sections are stored in said second storing unit, and when all ID code sections comprising the ID code are stored in said second storing unit, said all ID code sections are joined and transferred to said first storing unit to register as said ID code.

12. A communication apparatus according to claim 11,
wherein when said first control unit is set to the ID
registration mode by said ID registration mode setting

13. A communication apparatus according to claim 12,
wherein the ID code sections are sequentially stored in said
second storing unit.

15. A communication apparatus according to claim 14, further comprising at least two operating switches, said ID registration mode setting mechanism further comprising operation of said at least two operating switches in a predetermined order.

16. A communication apparatus according to claim 11,
said portable transmitter further comprising:
a clock generating unit to generate clock signals; and
a counter to count the clock signals generated by said

clock generating unit;

wherein said ID code sections are formed by counter values of said counter.

17. A communication apparatus according to claim 11, said portable transmitter comprising a notifying mechanism to indicate a storage state of said ID code sections.

18. A communication apparatus according to claim 17, wherein said notifying mechanism is a light-emitting diode.

19. A communication apparatus according to claim 11, wherein when said first control unit is set to the ID registration mode and said at least one operating switch is not operated within a predetermined time period, said first control unit reverts out of the ID registration mode.

20. A communication apparatus according to claim 12, wherein when said first control unit is set to the ID registration mode by said ID registration mode setting mechanism and said at least one operating switch is not operated multiple times within a predetermined time period, said first control unit reverts out of the ID registration mode.

001000" 09445360

a portable transmitter including: at least one
operating switch,

a second storing unit,

an ID registering mode setting mechanism to set the first control unit to an ID registration mode, and

a receiver including:

a third storing unit containing a reference code
stored therein, and

said receiver comparing said ID code within the received said electromagnetic signal with said reference code and supplying control signals from said control signal generating unit to a controlled device when said ID code and said reference code match;

when said first control unit is set to the ID registration mode by said ID registration mode setting mechanism and said at least one operating switch is operated, said ID code sections are stored in said second storing unit except for a final ID code section, and when the final ID code section is formed, the ID code sections stored in said second storing unit are read out, the ID code sections read out from said second storing unit and said last ID code section are joined and transferred to said first storing unit to register as said ID code.

22. A communication apparatus according to claim 21, wherein when said first control unit is set to the ID registration mode by said ID registration mode setting mechanism, said at least one operating switch is operated multiple times before the ID code sections register as said ID code.

23. A communication apparatus according to claim 22, wherein the ID code sections except for the final ID code section are sequentially stored in said second storing unit.

24. A communication apparatus according to Claim 23, wherein said ID registration mode setting mechanism comprises said at least one operating switch and a mode

25. A communication apparatus according to Claim 24, further comprising at least two operating switches, said ID registration mode setting mechanism further comprising operation of said at least two operating switches in a predetermined order.

a clock generating unit to generate clock signals; and
a counter to count the clock signals generated by said
clock generating unit;

27. A communication apparatus according to Claim 21, said portable transmitter comprising a notifying mechanism to indicate a storage state of said ID code sections.

29. A communication apparatus according to claim 21,

30. A communication apparatus according to claim 22, wherein when said first control unit is set to the ID registration mode by said ID registration mode setting mechanism and said at least one operating switch is not operated multiple times within a predetermined time period, said first control unit reverts out of the ID registration mode.

A communication apparatus comprises a portable transmitter, having operating switches, first and second storing units, a first control unit, ID registration mode setting unit, and a transmitting unit; and a receiver, having a receiving unit, a third storing unit wherein reference code is stored, and a control signal generating unit. The portable transmitter transmits signals containing the ID code, and the receiver supplies control signals to controlled mechanisms at the time that the ID code within the received signals matches the reference code. The ID code is made up of a plurality of ID code sections. When the first control unit is set to the ID registration mode and at least one operating switch is operated the ID code section is eventually registered to the first storing unit as the ID code.

FIG. 1



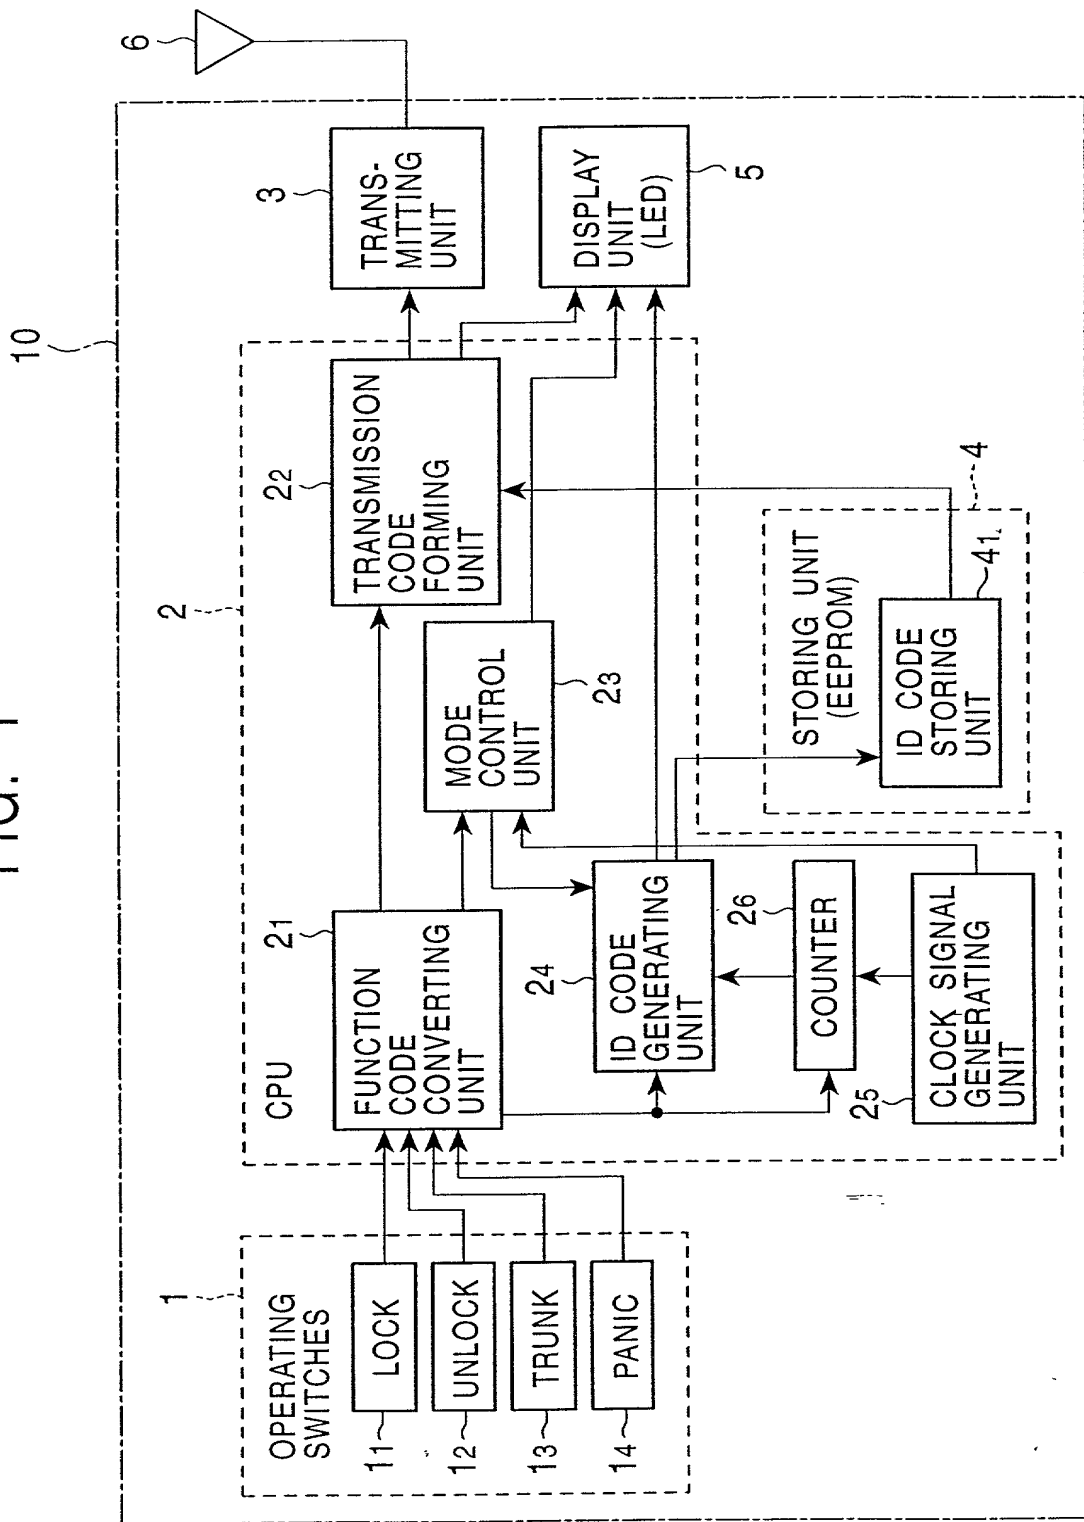


FIG. 2

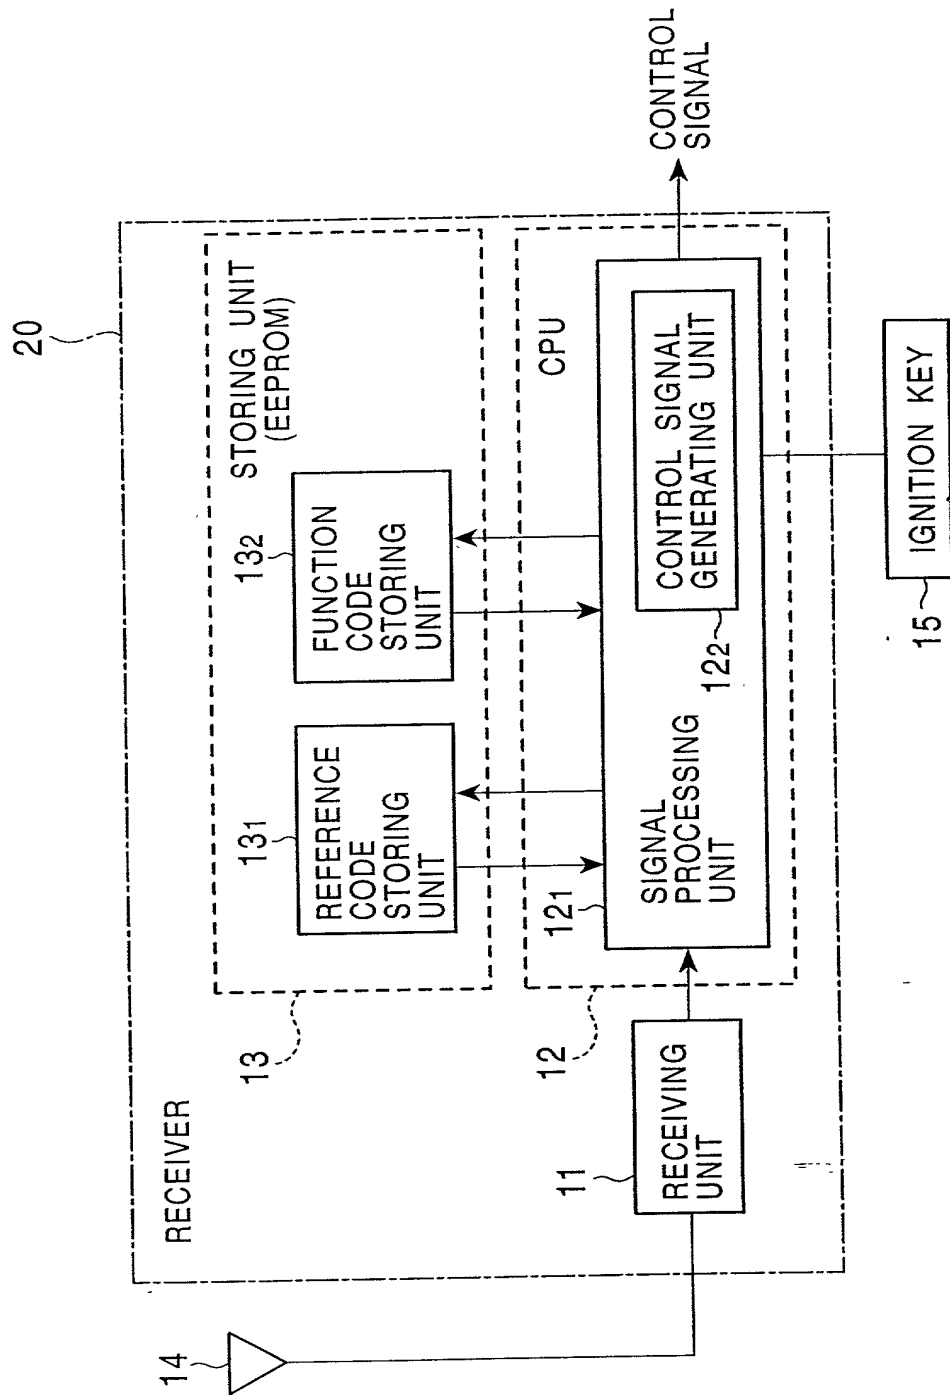

0000000000000000

FIG. 3

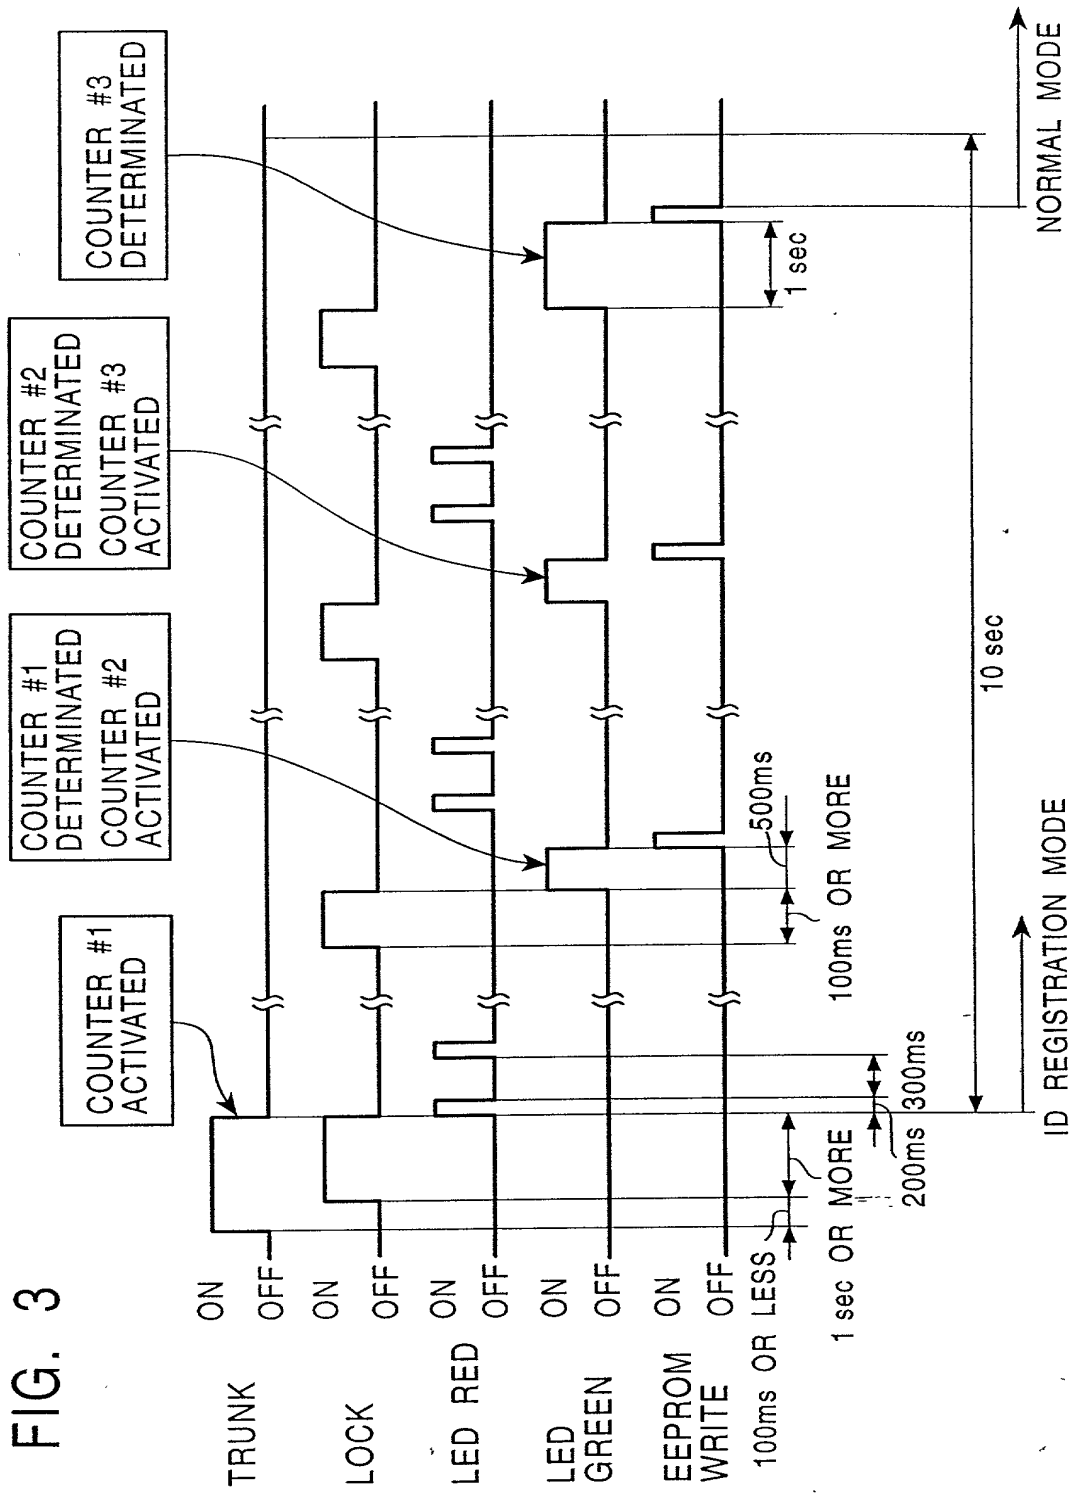

0000000000000000

FIG. 4

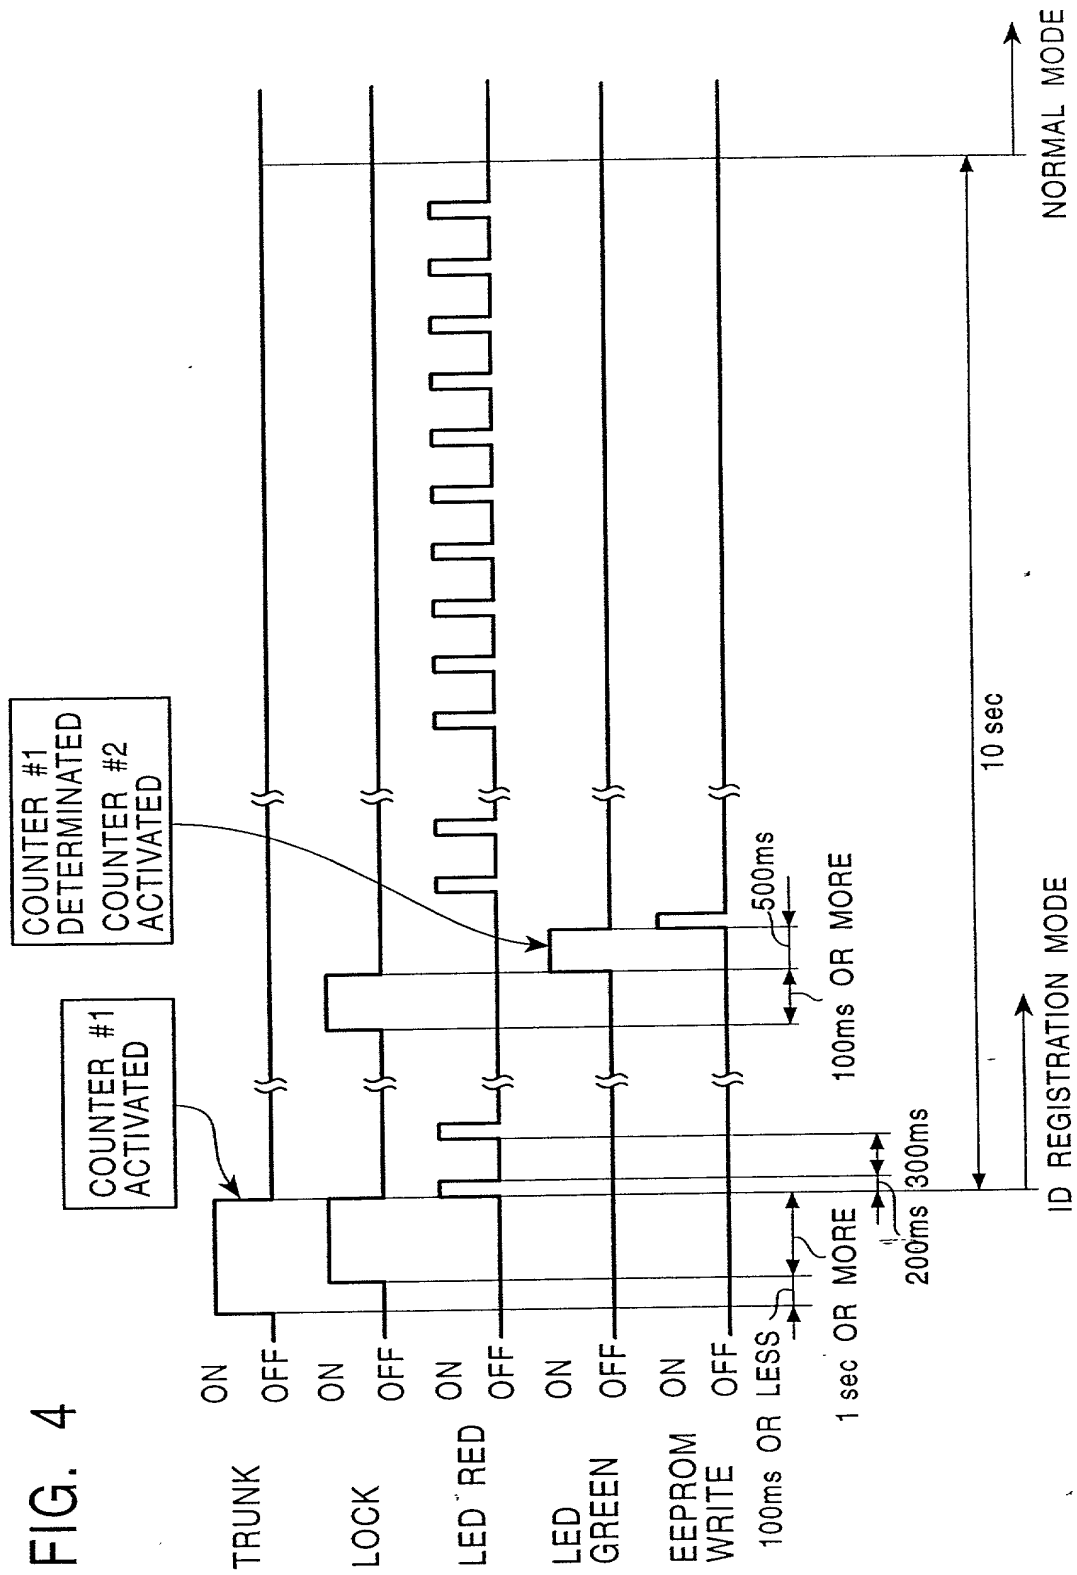


FIG. 5

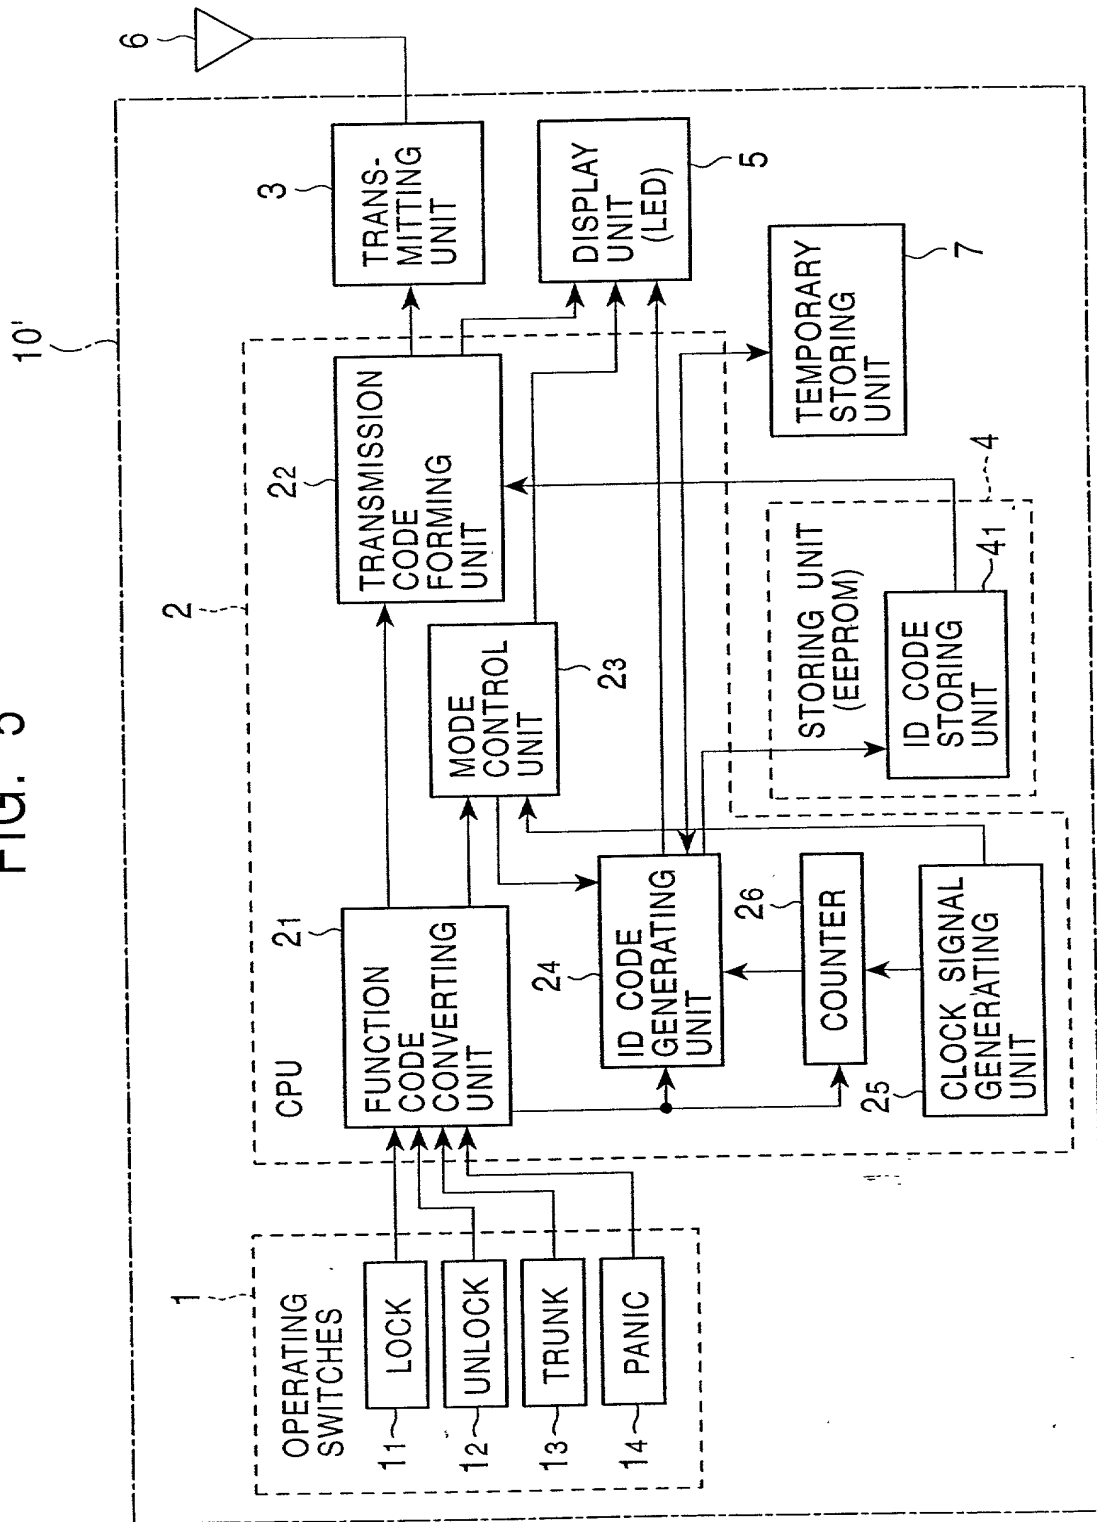


FIG. 6

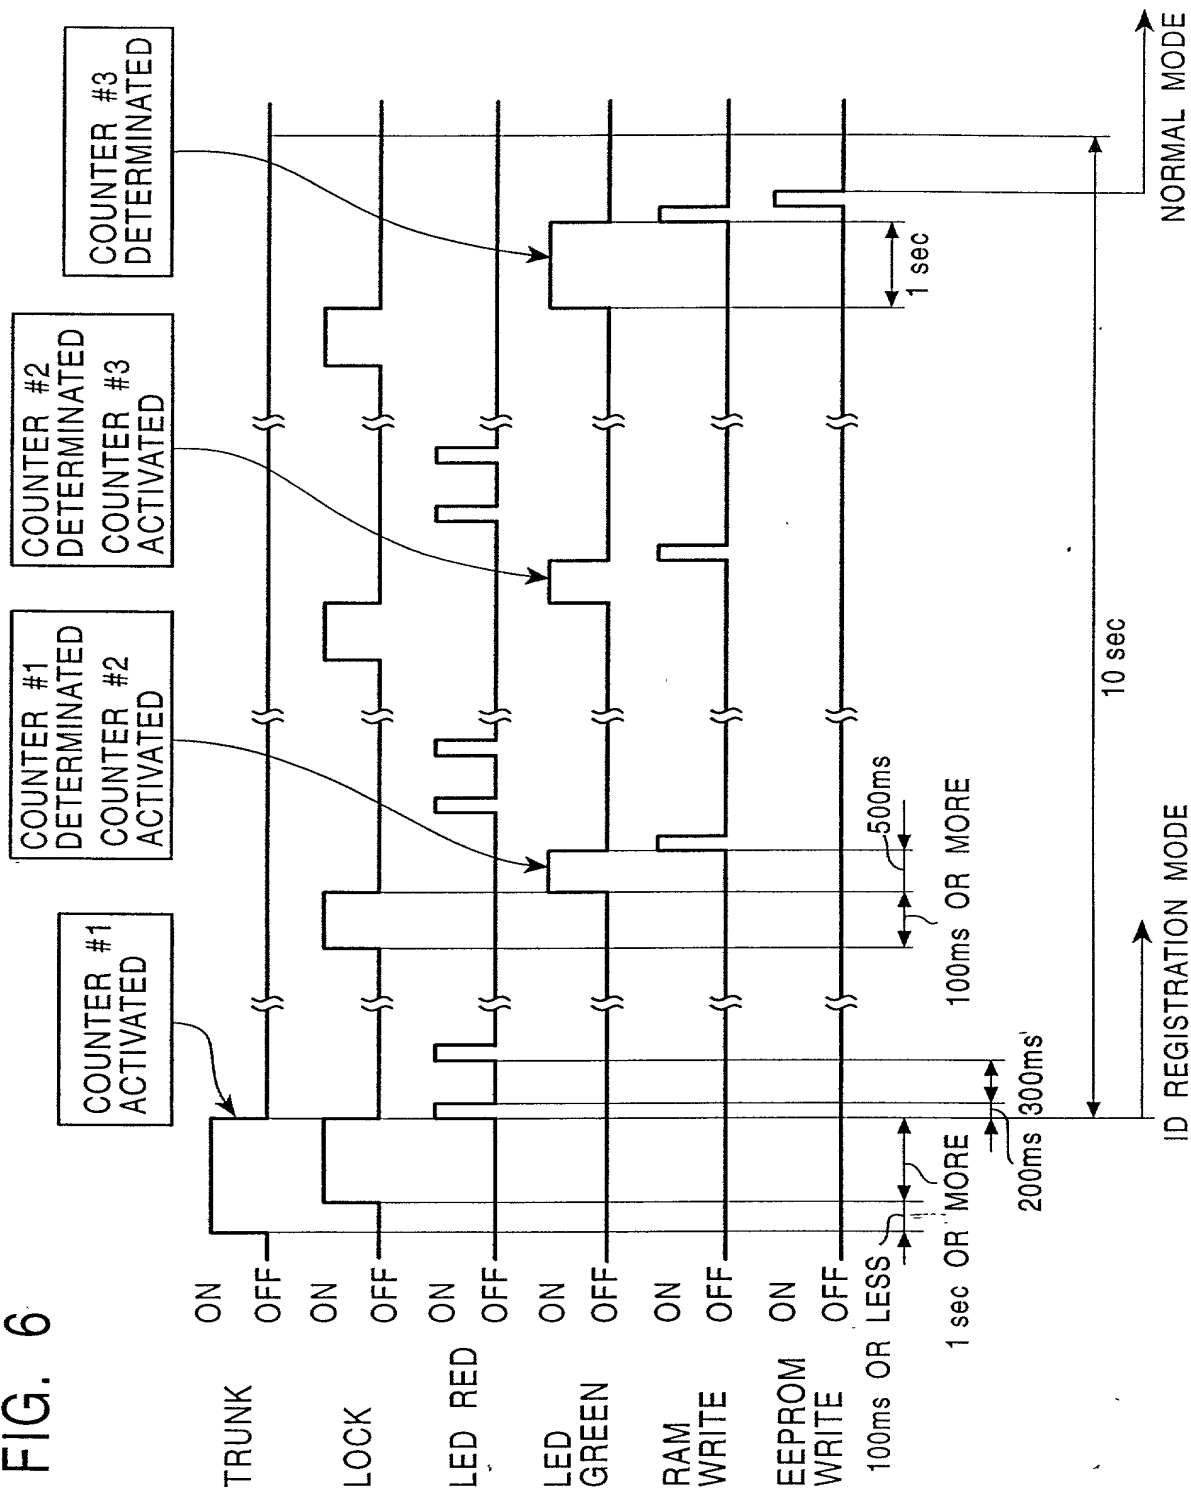


FIG. 7


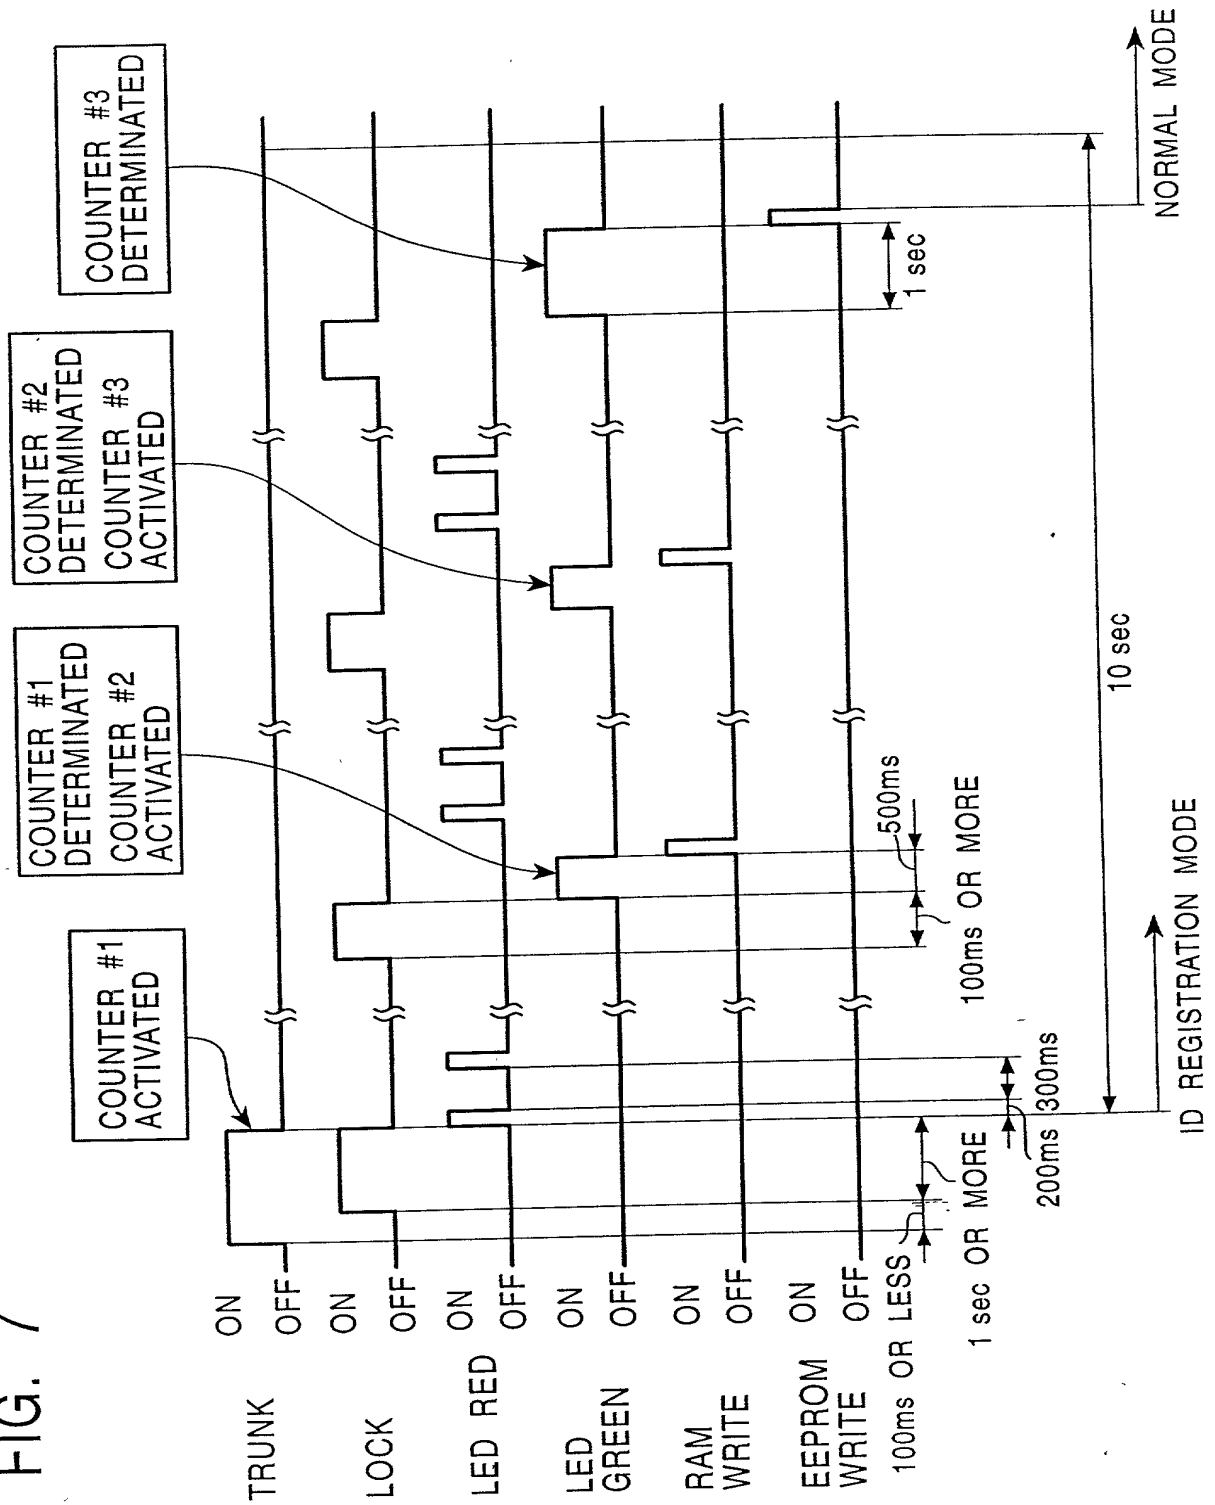


FIG. 8

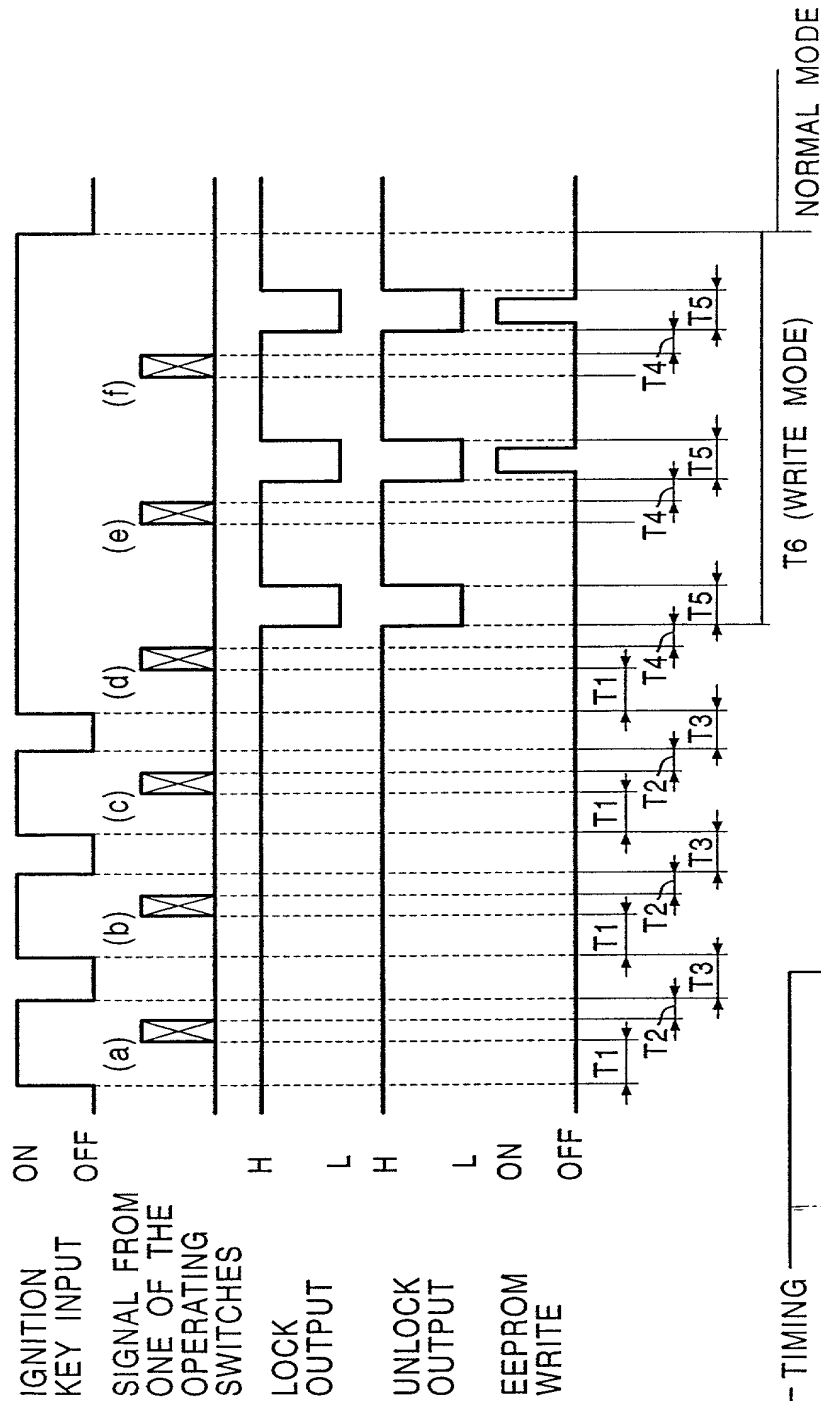

TIMING

 $30 \pm 10 \text{ ms} < T1 < 5 \pm 0.5 \text{ sec}$ $30 \pm 10 \text{ ms} < T2 < 5 \pm 0.5 \text{ sec}$ $30 \pm 10 \text{ ms} < T3 < 5 \pm 0.5 \text{ sec}$ $T4 : 30 \text{ ms} \pm 10 \text{ ms}$ $T5 : 0.6 \pm 0.1 \text{ sec}$ $T6 : \text{WITHIN } 10 \pm 1 \text{ sec}$

FIG. 9
PRIOR ART


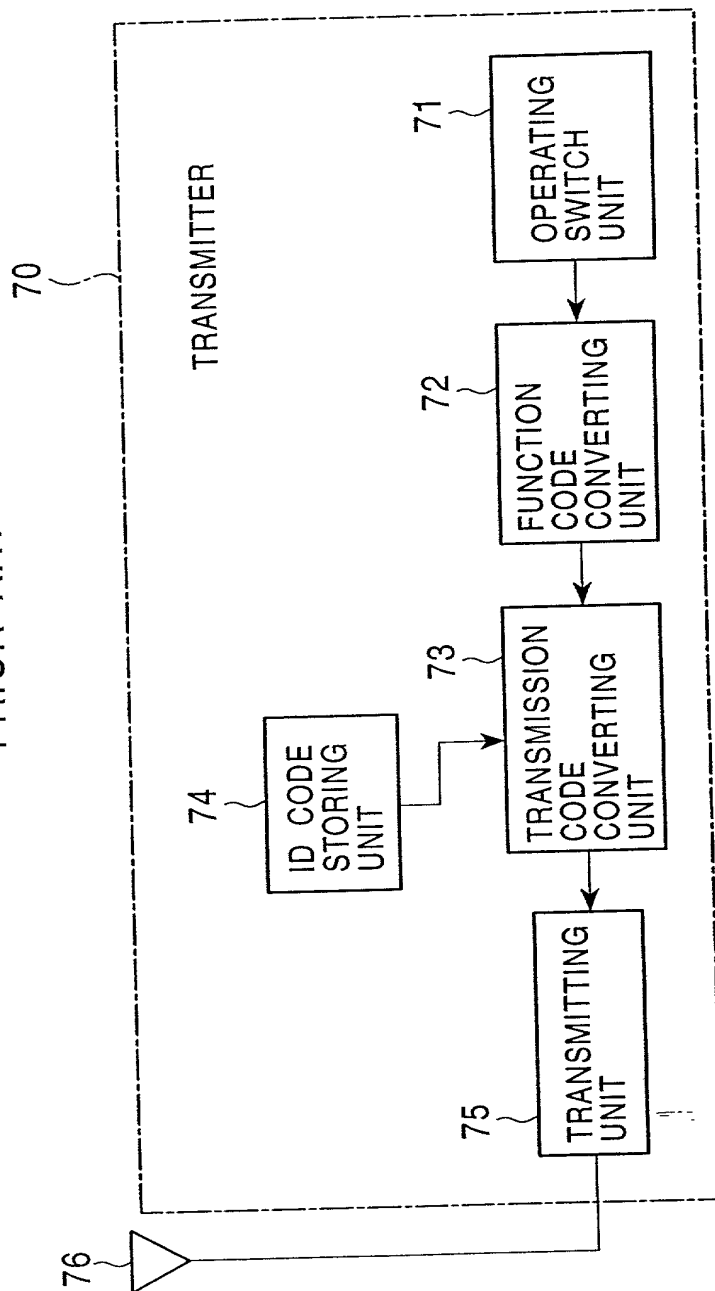


FIG. 10
PRIOR ART

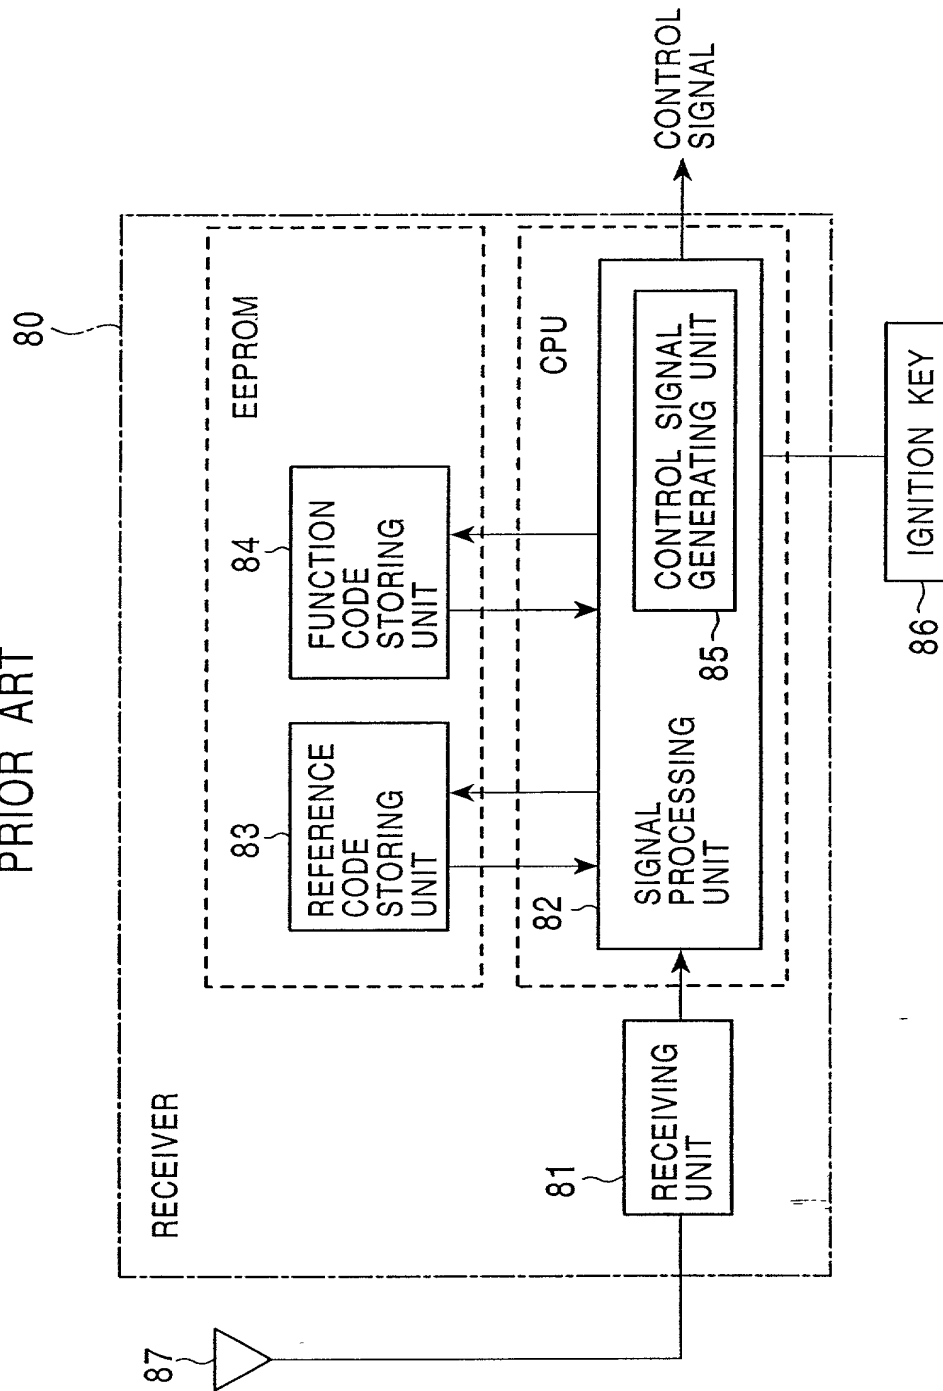

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

COMMUNICATION APPARATUS CAPABLE OF
REGISTERING ID CODES APPROPRIATED TO
PORTABLE TRANSMITTERS BY OPERATING
THE TRANSMITTERS

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ __月__日に提出され、米国出願番号または特許協定条約
国際出願番号を____とし、
(該当する場合) _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
11-255918

(Number) (番号)	Japan (Country) (国名)
(Number) (番号)	(Country) (国名)

私は、第35編米国法典119条(e)項に基いて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、下記の米国法典第35編120条に基いて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.) (出願番号)	(Filing Date) (出願日)
(Application No.) (出願番号)	(Filing Date) (出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
優先権主張なし

09/September/1999 (Day/Month/Year Filed) (出願年月日)
(Day/Month/Year Filed) (出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)
(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

(Supply similar information and signature for third and subsequent joint inventors.)

Variable	Mean	SD	Min	Max
Age	34.5	10.2	22	55
Gender	Male	Female		
Marital status	Married	Single		
Education	High school	College		
Occupation	Manager	Worker		
Income	Low	High		
Health status	Good	Poor		
Smoking status	Smoker	Non-smoker		
Alcohol consumption	Regular	Occasional		
Exercise frequency	Regular	Occasional		
Stress level	Low	High		
Sleep quality	Good	Poor		
Dietary habits	Healthy	Unhealthy		
Family size	Small	Large		
Work-life balance	Good	Poor		
Life satisfaction	High	Low		
Overall well-being	Good	Poor		

Variable	Mean	Standard Deviation	Minimum	Maximum
Age	34.5	10.2	21	55
Gender	0.5	0.5	0	1
Marital Status	0.6	0.5	0	1
Education	12.5	1.5	9	16
Income	35000	15000	10000	70000
Health	0.8	0.2	0	1
Smoking	0.3	0.5	0	1
Alcohol	0.2	0.4	0	1
Exercise	0.4	0.5	0	1
Stress	0.6	0.5	0	1
Sleep	0.7	0.3	0	1
Diet	0.5	0.5	0	1
Work	0.8	0.2	0	1
Family	0.6	0.5	0	1
Friends	0.7	0.4	0	1
Hobbies	0.5	0.5	0	1
Travel	0.4	0.5	0	1
Shopping	0.6	0.5	0	1
Reading	0.5	0.5	0	1
TV	0.7	0.4	0	1
Music	0.6	0.5	0	1
Gardening	0.4	0.5	0	1
Cooking	0.5	0.5	0	1
Volunteering	0.3	0.5	0	1
Religion	0.5	0.5	0	1
Politics	0.4	0.5	0	1
Environment	0.6	0.5	0	1
Technology	0.7	0.4	0	1
Art	0.5	0.5	0	1
Sports	0.6	0.5	0	1
Traveling	0.4	0.5	0	1
Learning	0.5	0.5	0	1
Working	0.8	0.2	0	1
Living	0.6	0.5	0	1
Feeling	0.7	0.4	0	1
Thinking	0.5	0.5	0	1
Acting	0.6	0.5	0	1
Speaking	0.7	0.4	0	1
Writing	0.5	0.5	0	1
Listening	0.6	0.5	0	1
Watching	0.7	0.4	0	1
Eating	0.5	0.5	0	1
Dressing	0.6	0.5	0	1
Grooming	0.7	0.4	0	1
Hygiene	0.8	0.2	0	1
Healthcare	0.6	0.5	0	1
Insurance	0.7	0.4	0	1
Investment	0.5	0.5	0	1
Savings	0.6	0.5	0	1
Debt	0.4	0.5	0	1
Assets	0.5	0.5	0	1
Liabilities	0.3	0.5	0	1
Net Worth	0.6	0.5	0	1
Financial	0.7	0.4	0	1
Legal	0.5	0.5	0	1
Tax	0.6	0.5	0	1
Government	0.7	0.4	0	1
Community	0.5	0.5	0	1
Society	0.6	0.5	0	1
Culture	0.7	0.4	0	1
Religion	0.5	0.5	0	1
Politics	0.6	0.5	0	1
Environment	0.7	0.4	0	1
Technology	0.8	0.2	0	1
Art	0.5	0.5	0	1
Sports	0.6	0.5	0	1
Traveling	0.4	0.5	0	1
Learning	0.5	0.5	0	1
Working	0.8	0.2	0	1
Living	0.6	0.5	0	1
Feeling	0.7	0.4	0	1
Thinking	0.5	0.5	0	1
Acting	0.6	0.5	0	1
Speaking	0.7	0.4	0	1
Writing	0.5	0.5	0	1
Listening	0.6	0.5	0	1
Watching	0.7	0.4	0	1
Eating	0.5	0.5	0	1
Dressing	0.6	0.5	0	1
Grooming	0.7	0.4	0	1
Hygiene	0.8	0.2	0	1
Healthcare	0.6	0.5	0	1
Insurance	0.7	0.4	0	1
Investment	0.5	0.5	0	1
Savings	0.6	0.5	0	1
Debt	0.4	0.5	0	1
Assets	0.5	0.5	0	

Guy W. Shoup	26,805
F. David AuBuchon	20,493
Gustavo Siller, Jr.	32,305
Jasper W. Dockrey	33,868
John C. Freeman	34,483
William F. Prendergast	34,699
Michael E. Milz	34,880
Paul E. Rauch	38,591
Vita G. Conforti	39,639
Tadashi Horie	40,437
Richard K. Clark	40,560
Joseph F. Hetz	41,070
Daniel B. Burg	41,649
Jason C. White	42,223
James A. Collins	43,557
Abdollah Katbab	45,325
Anthony P. Curtis	46,193